

inVUE.

S3100V

Stand Tall. Move Freely.



INTERACTIVE EXPERIENCE

Clean, vertical presentation highlights the featured product and encourages customer interaction.

ENHANCED SALES

Wireless sensor frees associates to move about the store and sell complementary products.

ANALYTICS & REPORTING

Manage planogram compliance and understand how shoppers interact with the device.



OVERVIEW

A visually engaging display that invites customers to experience products in their truest form – without cords or wires. Retailers can choose the desired security setting while advanced analytics provide insight on customer engagement and planogram compliance.

FEATURES AND BENEFITS

- 1 Consistent look and feel across tablet and smartphone displays
- 2 Alarm sensor cannot be blocked or disrupted
- 3 Streamlined sensor design provides device stability
- 4 Choose an Alarm Zone or Secure Zone and determine security parameters
- 5 Sensor alarm will sound when device crosses the zone limit
- 6 Optional Alarm Node flashes red and provides louder alarm to enhance display security




S3100V is part of InVue LIVE—a connected platform of products that help retailers track, monitor and manage store operations in real time. With a suite of hardware and software solutions across Merchandising, Access Control, Security and Operations, InVue LIVE is the single source for retailers to gain in-store visibility across their estate.



S3100V USES INVUE LIVE'S MOBILE APPLICATION FOR:

- › Planogram compliance management
- › Insights into real-time customer engagement
- › Disarming the security alarm

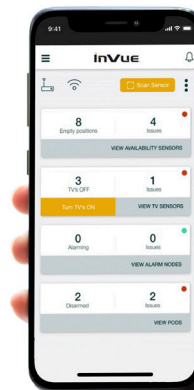

S3100V STAND

ORDER CODE	DESCRIPTION	NOTES
DCD300-B	Vertical Wireless Stand	Black
DCD300-W	Vertical Wireless Stand	White

S3100V SENSORS

ORDER CODE	DESCRIPTION	NOTES
DCD303	Vertical Wireless USB-C Sensor	Black or White
DCD303W-00	Vertical Wireless USB-C Sensor (202MHz-928MHz)	White
DCD303W-01	Vertical Wireless USB-C Sensor (855MHz-881MHz)	White
DCD303W-06	Vertical Wireless USB-C Sensor (923 MHz)	White
DCD304	Vertical Wireless Lightning Sensor	Black or White
DCD304W-00	Vertical Wireless Lightning Sensor (902Mhz-928Mhz)	White
DCD304W-01	Vertical Wireless Lightning Sensor (855MHz-881MHz)	White
DCD304W-06	Vertical Wireless Lightning Sensor (923 MHz)	White

ZONE MANAGER

ORDER CODE	DESCRIPTION	NOTES
DBD701	Wireless Exclusion Zone Manager (52 cm diameter)	Requires YLRC & YC*
DBD702	Wireless Zone Manager (30 cm diameter)	Inclusion/Exclusion Requires YLRC & YC*
YLR52	5.3VDC/6.5A Power Supply	
YC3	C14 AC Cable DIB/PIB - US	
YC6	C14 AC Cable DIB/PIB - EU	
YC9	C7 AC Power Cable - US	
YC10	C7 AC Power Cable - UK	
YC11	C7 AC Power Cable - EU	
YC12	C7 AC Power Cable - AU	
YC14	C7 AC Power Cable - JP	

ALARM NODE

ORDER CODE	DESCRIPTION	NOTES
DLD300-00B	LIVE Alarm Node (902 MHz -928 MHz)	Black
DLD300-00W	LIVE Alarm Node (902 MHz -928 MHz)	White
DLD300-01B	LIVE Alarm Node (855 MHz -881 MHz)	Black
DLD300-01W	LIVE Alarm Node (855 MHz -881 MHz)	White
DLD300-06B	LIVE Alarm Node (AS923 MHz)	Black
DLD300-06W	LIVE Alarm Node (AS923 MHz)	White

LIVE NETWORK

ORDER CODE	DESCRIPTION	NOTES
LI6000	LIVE Annual License Fee	Per Position

All InVue LIVE products will need the Annual License and a LoRaWAN Gateway to operate.